
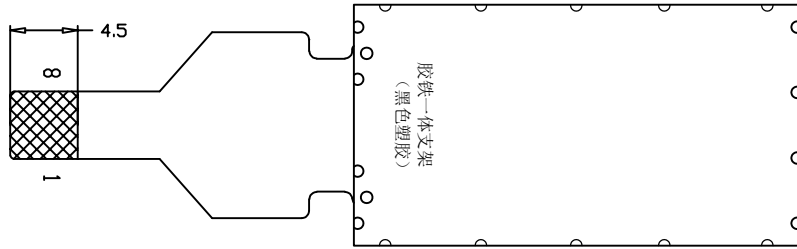


ROHS

Revision	Description	Date	Signed
01	First	2026/05/14	D W W

PIN	SYMBOL
1	LEDA
2	GND
3	RESET
4	RS
5	SDA
6	SCL
7	VDD
8	CS

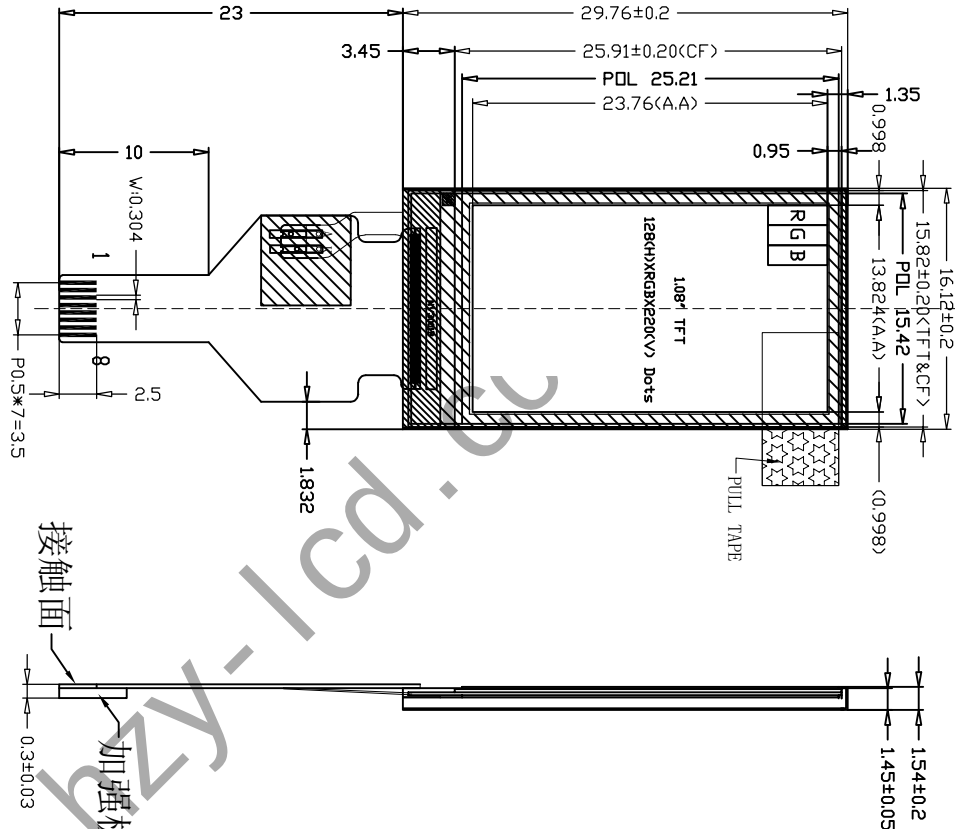

4线SPI

4线SPI

NOTES:

1. DISPLAY TYPE:1.08" TFT, TRANSMISSIVE
2. DRIVER IC:NV3001B OR COMPATIBLE
3. VIEWING DIRECTION: ALL
4. BACKLIGHT: 1 pcs White LED
5. BRIGHTNESS: 250 mcd/m²
6. INPUT CURRENT: VCC 2.8V (type)
7. OPERATING TEMP: -20° C ~ +70° C
8. STORAGE TEMP: -30° C ~ +80° C
9. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
10. ROHS COMPLIABLY

深圳市华之洋光电科技有限公司
SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD

華之洋 HEA ZHI YANG 深圳市華之洋光電科技有限公司 SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD									
Customer Ref.	Model No.		Drawing Title		HZ0108QCPTX01-A0				
Part No.	Approve	D W W	Material	Unmarked Tolerance	Unit	Scale	Page		
Drawing No.	Checked		LCM	±0.2	mm	--	1 of 1		
	Draw		Date	2026/05/14	Rev	00			