
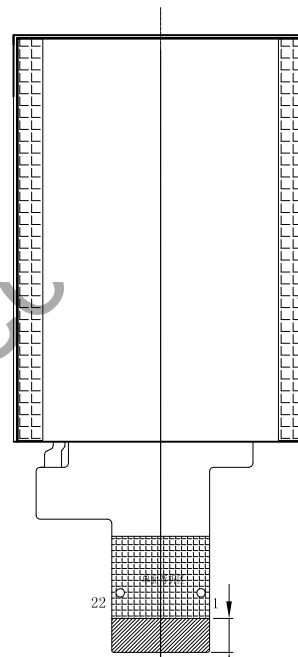



R0SH

Reversion	Discription	Date	Signed
V0	首次发行	2025. 07. 03	FJB
V1	更改易撕贴位置	2025. 09. 05	Penglz

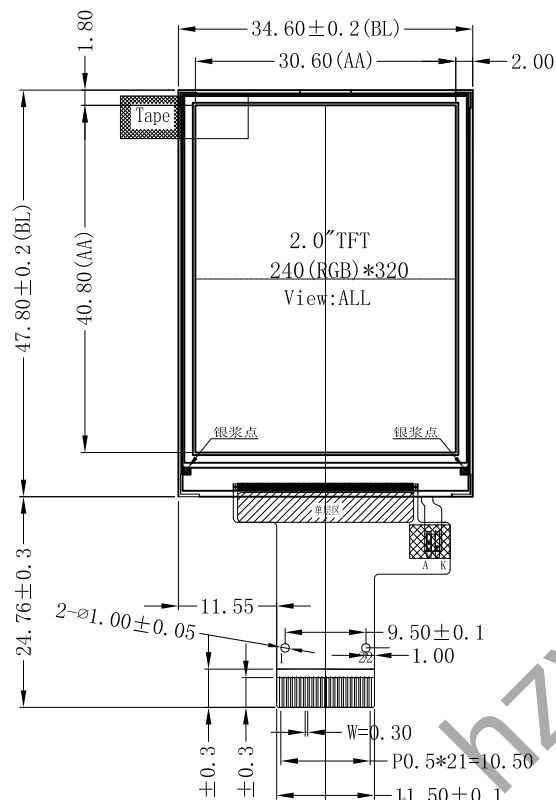


—双面胶T=0.1mm

NO.	Pin name
1	LEDA
2	LEDK
3	IM2
4	IM1
5	IM0
6	VDD (2.8V)
7	DB7
8	DB6
9	DB5
10	DB4
11	DB3
12	DB2
13	DB1
14	DB0
15	RD
16	WR
17	RS
18	CS
19	TE
20	REST
21	SDA
22	GND


FPC展开出货

NOTES:

1. DISPLAY TYPE:BOE(超宽温) 2.0" TFT, Normally black
2. DRIVER IC:ST7789P3 or Compatible
3. VIEWING DIRECTION: All 0'clock
4. BACKLIGHT: 3 pcs White LED
5. Luminance: 500cd/m²(typ) LEDA0
6. INPUT VOLTAGE: VCC 2.8V(typ)
7. OPERATING TEMP: -20° C~ +70° C BACKL
8. STORAGE TEMP: -30° C~ +80° C LED
9. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
10. RoHS COMPLIABLY
11. Recommend case window 0.3mm larger than the single side of Active Area



LED:IF =60mA,VF=3.0V

 深圳市华之洋光电科技有限公司 SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD								
Customer Ref.	Model No.		Drawing Title	HZ0200QVPBSWS01N-AA				
---	Approve		Material	Unmarked Tolerance	Unit	Scale	Page	
Part No.								
---	Checked		LCM	± 0.2	mm	--	1 of 1	
Drawing No.	Draw	FJB	Date	2025. 07. 03	Rev V0			
