
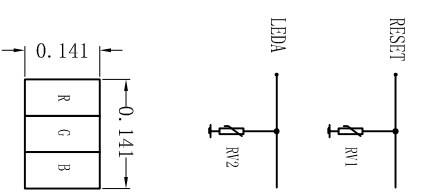
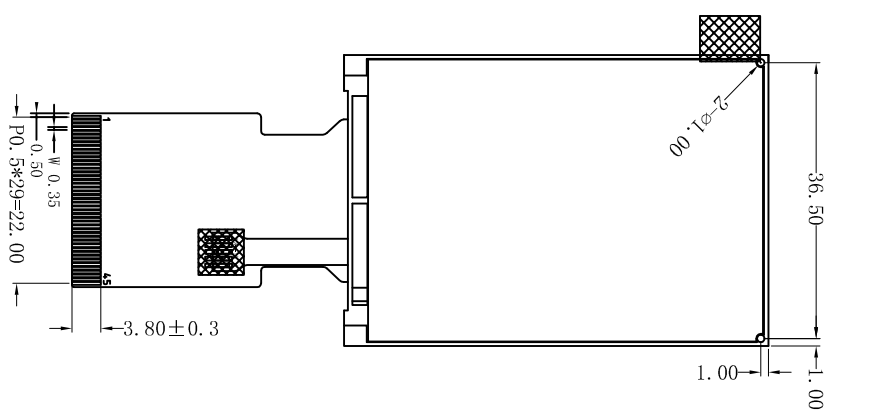


ROSH


Revision	Description	Date	Signed
01	First	2022.04.15	YP

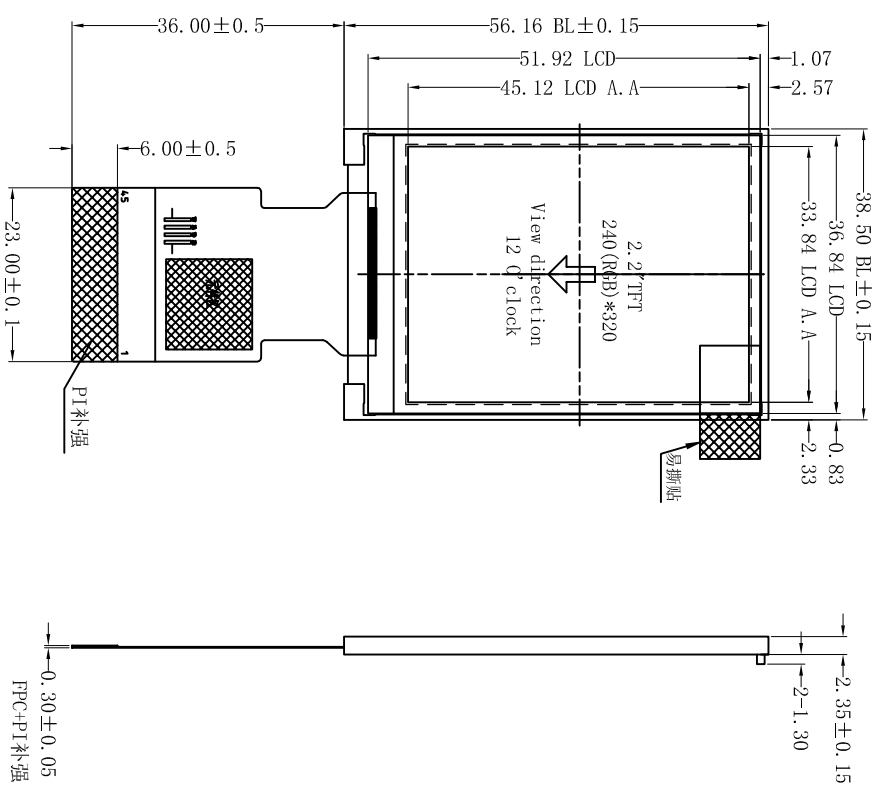

PIN SYMBOL	Pin No.	Function
1	LED_R4	
2	IM0	
3	IM1	
4	IM2	
5	IM3	
6	RESET	
7	VSYNC	
8	HSYNC	
9	DOTCLK	
10	ENABLE	
11	D17	
12	D16	
13	D15	
14	D14	
15	D13	
16	D12	
31	RD	
32	RS/SCL	
33	WR	
34	CS	
35	PMARK	
36	VCC	
37	GND	
38	LED_A	
39	LED_K1	
40	LED_K2	
41	LED_K3	
42	VD(OC)	
43	XR(OC)	
44	YU(OC)	
45	XI(OC)	

NOTES:

1. DISPLAY TYPE: 2.2" TFT, TRANSMISSIVE
2. DRIVER IC: ST7789V2
3. VIEWING DIRECTION: 12 O'CLOCK
4. BACKLIGHT: 4 pcs White LED
5. INPUT CURRENT: VCC 2.8V (type)
6. OPERATING TEMP: -20° C ~ +70° C
7. STORAGE TEMP: -30° C ~ +80° C
8. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
9. ROHS COMPLIABLY



深圳市华之洋光电科技有限公司
 Shenzhen HZY Photoelectric Technology Co., Ltd

Customer Ref.	Model No.	Drawing Title
---	---	HZ022QTB01-A0
Part No.	Approve	Material
---	---	LCM
Drawing No.	Checked	Unmarked Tolerance
---	---	±0.2
	Draw	Unit
	YP	mm
		Scale
		1 of 1