


ROSH

| | | | |
|----------|-------------|------------|--------|
| Revision | Discription | Date | Signed |
| 01 | First | 2022.12.12 | YP |


PIN ASSIGNMENTS

| | |
|----|-----------|
| 1 | CLK_P |
| 2 | I0VCC1.8V |
| 3 | CLK_N |
| 4 | RRESET |
| 5 | GND |
| 6 | NC |
| 7 | DO_P |
| 8 | LEDA |
| 9 | DO_N |
| 10 | LEDK |
| 11 | GND |
| 12 | VCC2.8V |

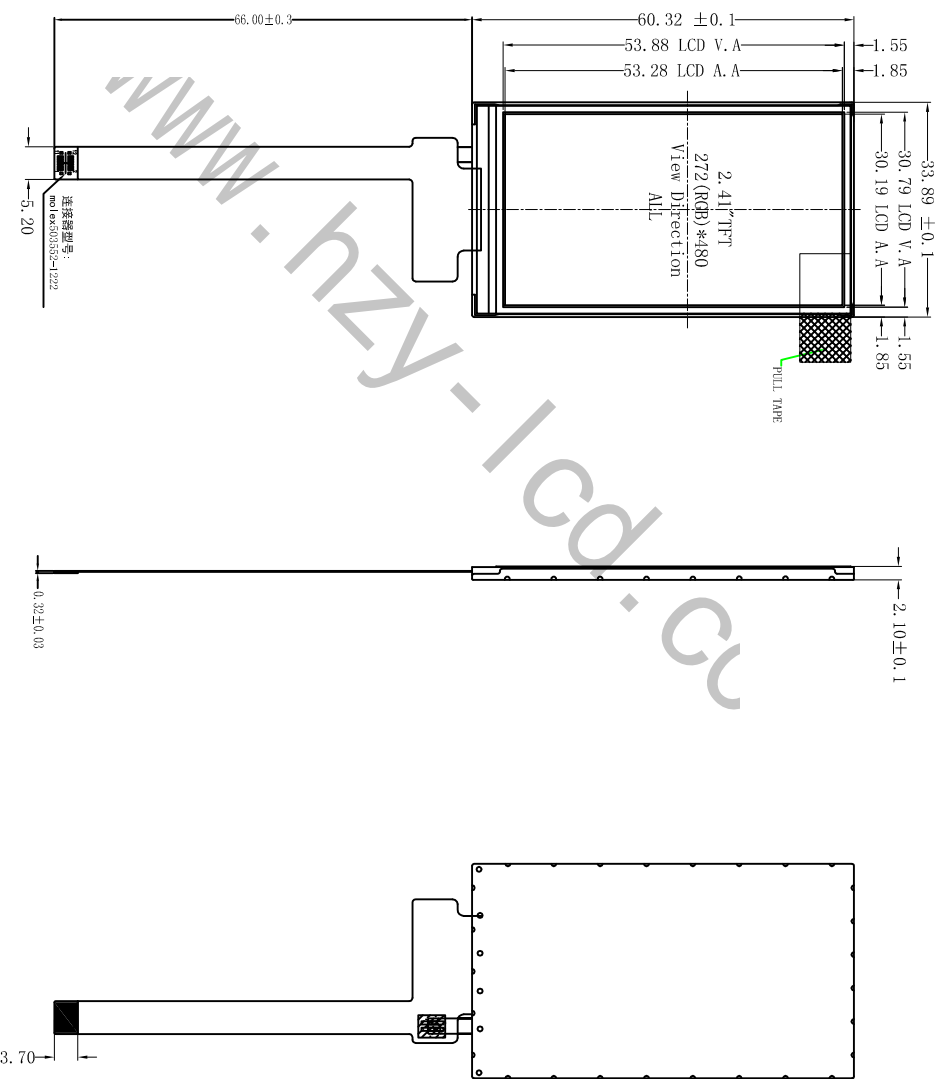

NOTES:

1. DISPLAY TYPE: 2.41" TFT , TRANSMISSIVE
2. DRIVER IC: ST7797
3. VIEWING DIRECTION: ALL 0° CLOCK
4. BACKLIGHT: 5 pcs White LED
5. INPUT CURRENT: VCC 2.8V (type)
6. OPERATING TEMP: -20° C ~ +70° C
7. STORAGE TEMP: -30° C ~ +80° C
8. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
9. ROHS COMPLIABLY

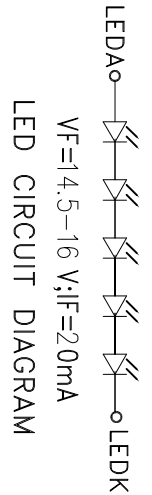

深圳市华之洋光电科技有限公司
Shenzhen HZY Photoelectric Technology Co., Ltd

| | | | | | | | |
|---------------|-----------|----------------|--------------------|--------------------|-------|--------|--------|
| Customer Ref. | Model No. | Drawing Title | Material | Unmarked Tolerance | Unit | Scale | Page |
| --- | --- | HZ0241PBS18-A0 | LCM | ±0.2 | mm | --- | 1 of 1 |
| Part No. | Approve | Material | Unmarked Tolerance | Unit | Scale | Page | |
| --- | Checked | LCM | ±0.2 | mm | --- | 1 of 1 | |
| Drawing No. | Draw | Date | 2022.12.12 | Rev | 00 | | |
| --- | YP | | | | | | |

8 7 6 5 4 3 2 1