
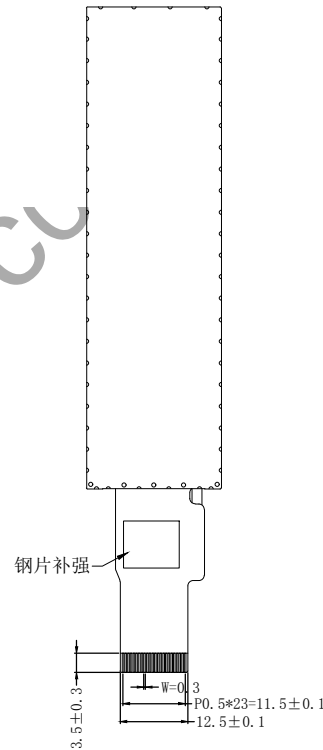



ROSH

Reversion	Discription	Date	Signed
V0	First	2026.04.15	Allen

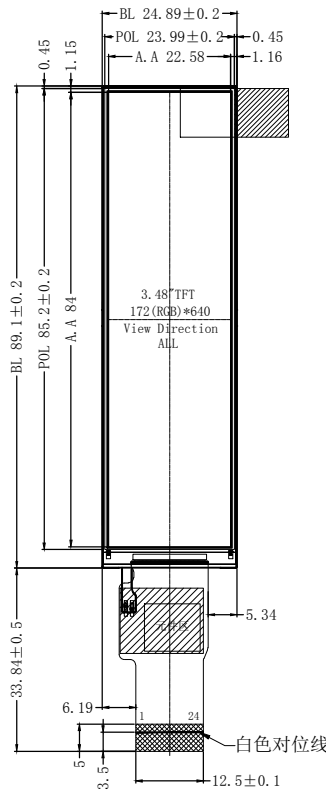


PIN DESCRIPTION

1	RST
2	SCL
3	GND
4	CS
5	VDD (3.3V)
6	VDDI (3.3V)
7	QSPI-0
8	GND
9	LED_K
10	LED_A
11	GND
12	CTP_INT (3.3V)
13	CTP_SDA (3.3V)
14	CTP_SCL (3.3V)
15	CTP_RST (3.3V)
16	NC
17	NC
18	NC
19	NC
20	NC
21	QSPI-D1
22	QSPI-D2
23	QSPI-D3
24	TE

NOTES:

1. DISPLAY TYPE:3.48" TFT, TRANSMISSIVE
2. DRIVER IC:AXS15231B or compatible
3. VIEWING DIRECTION: ALL
4. BACKLIGHT: 6 pcs White LED
5. BRIGHTNESS: 400cd/m2(TYP)
6. INPUT CURRENT: VCC 3.3V(TYP)
7. OPERATING TEMP: -20° C~ +70° C
8. STORAGE TEMP: -30° C~ +80° C
9. UNDEFINED DIMENSION TOLERANCE: ±0.3mm
10. RoHS COMPLIABLY
11. 建议机壳开窗可视区比 LCD A.A区单边大 0.3mm

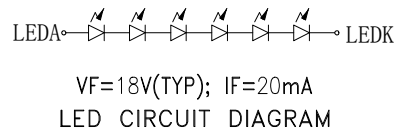

FPC展开出货

		深圳市华之洋光电科技有限公司						
SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD								
Customer Ref.	Model No.		Drawing Title		HZ0348VGPBA01-A0			
Part No.	Approve		Material	Unmarked Tolerance	Unit	Scale	Page	
Drawing No.	Checked		LCM	±0.3	mm	--	1 of 1	
	Draw	Allen	Date	2024.08.06	Rev V0		