
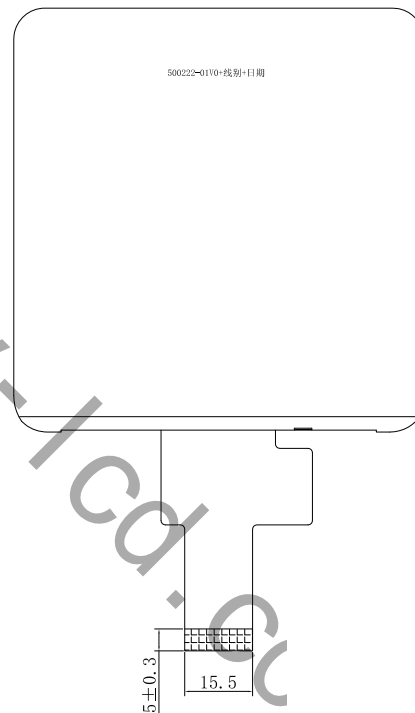


ROSH

Reversion	Discription	Date	Signed
V0	First issue	2026-1-30	Penglz

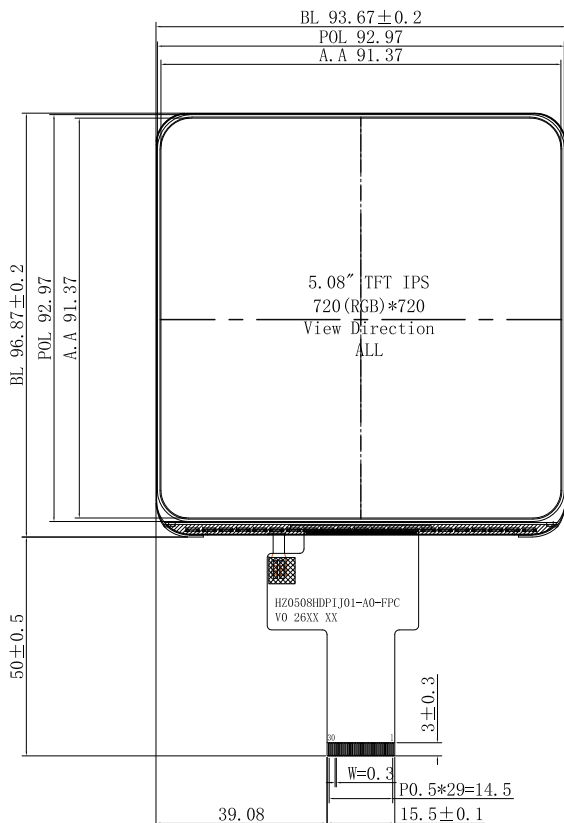


No.	PIN NAME
1	LED+
2	LED-
3	LED-
4	VCI
5	IOVCC
6	RESET
7	TE
8	PWM(NC)
9	GND
10	D0P
11	D0N
12	GND
13	D1P
14	D1N
15	GND
16	CLKP
17	CLKN
18	GND
19	D2P
20	D2N
21	GND
22	D3P
23	D3N
24	GND
25	TP_INT
26	TP_SDA
27	TP_SCL
28	TP_RST
29	TP_VCI
30	GND

MIPI-4lane

NOTES:

1. DISPLAY TYPE:5.08" TFT, TRANSMISSIVE Normally Black
2. DRIVER IC:JD9365TX or compatible
3. VIEWING DIRECTION: All
4. BACKLIGHT: 20 pcs White LED
5. BRIGHTNESS: 450 cd/m<sup>2</sup> (typ)
6. INPUT VOLTAGE: VCC 2.8V (typ)
7. OPERATING TEMP: -20° C ~ +70° C
8. STORAGE TEMP: -30° C ~ +80° C
9. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
10. RoHS COMPLIABLY
11. 建议机壳开窗可视区比LCD A. A区单边大 0.3mm



		深圳市华之洋光电科技有限公司 SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD				
Customer Ref.	Model No.	Drawing Title		HZ0508HDPIJ01-A0		
---	Approve	Material	Unmarked Tolerance	Unit	Scale	Page
---	Checked	LCM	±0.2	mm	--	1 of 1
Drawing No.	Draw	Penglz	Date	2026-1-30	Rev 00	