
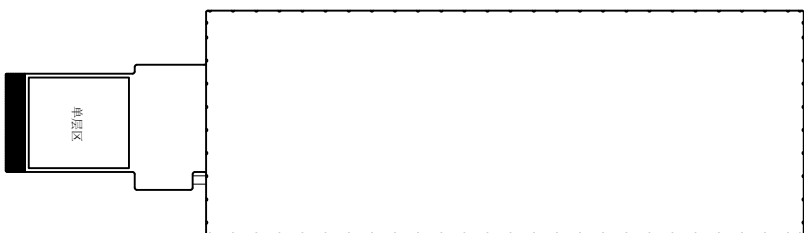



Revision	Description	Date	Signed
A0	First	24.06.07	Allen

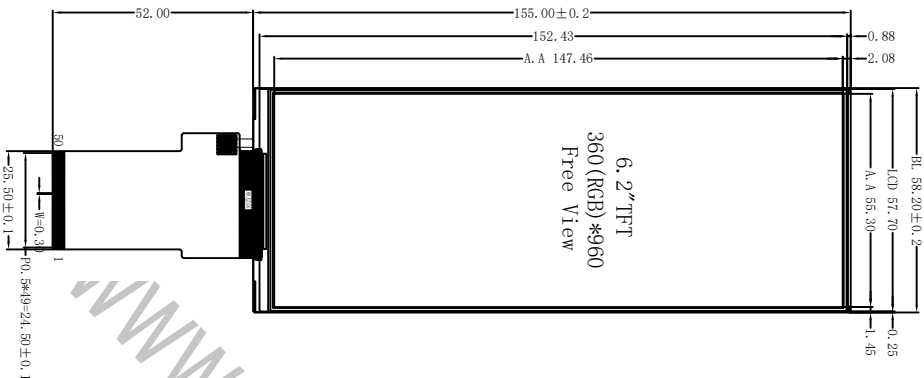

Pin	DESCRIPTION
1	LED K
2	LED A
3	GND
4	MIP1_D0N
5	MIP1_D0P
6	GND
7	MIP1_CLKN
8	MIP1_CLKP
9	GND
10	MIP1_D1N
11	MIP1_D1P
12	GND
13	VSYNC
14	HSYNC
15	DCLK
16	DE
17-24	BO-B7
25-32	GO-G7
33-40	RO-R7
41	RESX
42	CSX
43	SCL
44	SDA
45	SDB
46	IM0
47	IM1
48	IM2
49	LOWCC
50	VDD

NOTES:

1. DISPLAY TYPE: 6.2" TFT, TRANSMISSIVE
2. DRIVER IC: GC9503CV
3. VIEWING DIRECTION: ALL
4. BACKLIGHT: 12 pcs White LED
5. BRIGHTNESS: TBD
6. INPUT CURRENT: VCC 2.8V (TYP)
7. OPERATING TEMP: -20° C ~ +70° C
8. STORAGE TEMP: -30° C ~ +80° C
9. UNDEFINED DIMENSION TOLERANCE: ±0.3mm
10. RoHS COMPLIABLY



FPC展开出货

**深圳市华之洋光电科技有限公司**  
SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD

Customer Ref.	Model No.	Drawing Title	Unmarked Tolerance	Unit	Scale	Page
---	Approve	LCM	±0.3	mm	--	1 of 1
Part No.	Checked	Date	2024.06.07	Rev	00	
Drawing No.	Draw	Allen				