
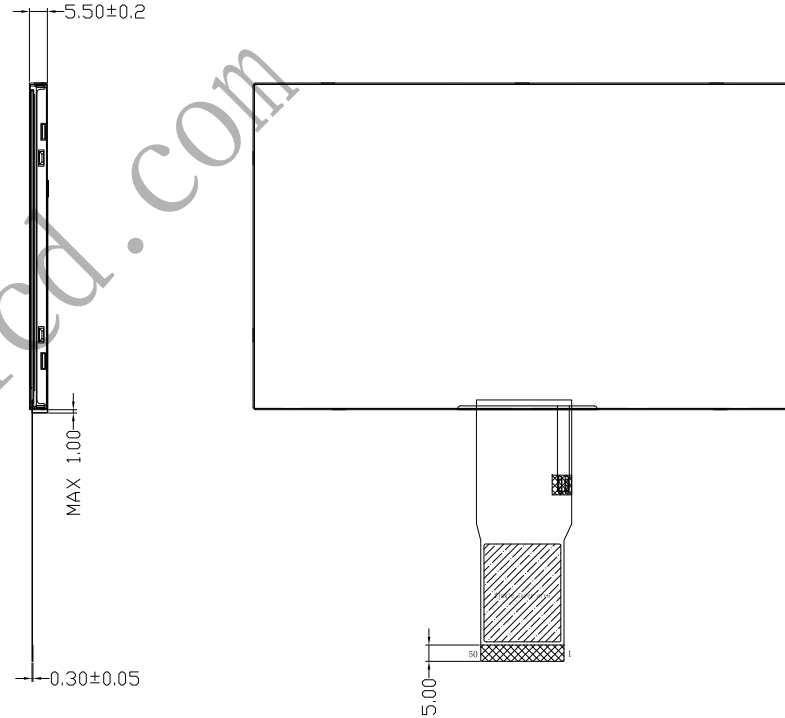


ROSH


Reversion	Discription	Date	Signed
V0	First issued	24.12.19	Penglz

PIN	DESCRIPTION
1	LEDA
2	LEDA
3	LEDK
4	LEDK
5	GND
6	VCOM
7	VDD
8	MODE
9	DE
10	VSYNC
11	HSYNC
12	B7
13	B6
14	B5
15	B4
16	B3
17	B2
18	B1
19	B0
20	G7
21	G6
22	G5
23	G4
24	G3
25	G2
26	G1
27	G0
28	R7
29	R6
30	R5
31	R4
32	R3
33	R2
34	R1
35	R0
36	GND
37	DCLK
38	GND
39	SHLR
40	UPDN
41	VGH
42	VGL
43	AVDD
44	RESET
45	NC
46	VCOM
47	DITHB
48	GND
49	NC
50	NC

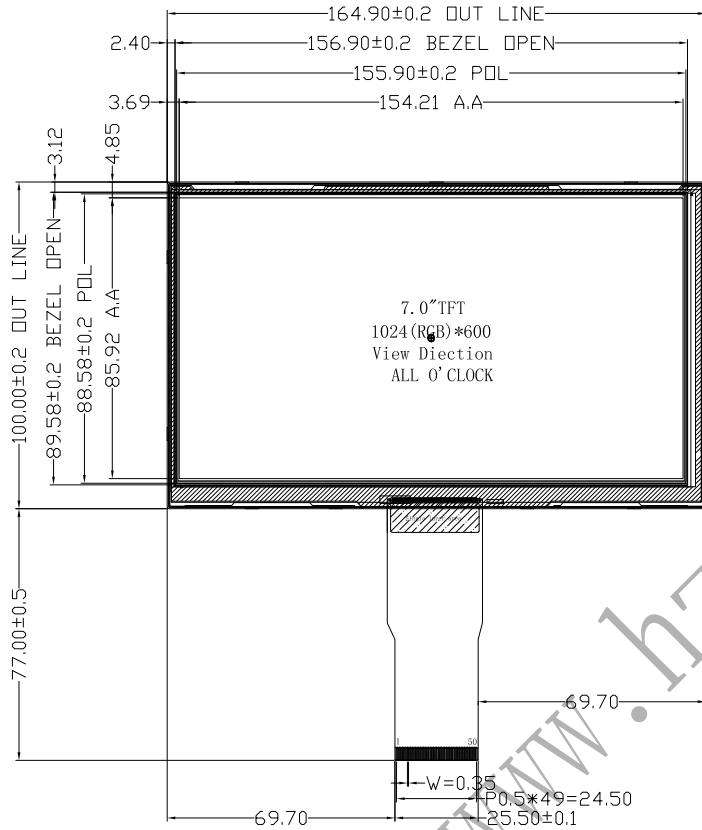

NOTES:

1. DISPLAY TYPE: 7.0" TFT, TRANSMISSIVE Normally Black
2. DRIVER IC: EK79001 or compatible
3. VIEWING DIRECTION: All
4. BACKLIGHT: 30 pcs White LED
5. BRIGHTNESS: 1000 cd/m² (typ)
6. INPUT VOLTAGE: VCC 3.3V (typ)
7. OPERATING TEMP: -20° C ~ +70° C
8. STORAGE TEMP: -30° C ~ +80° C
9. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
10. RoHS COMPLIABLY

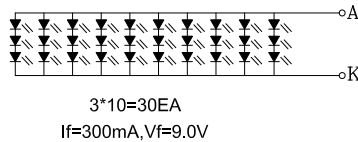

50PIN TTL

 華之洋 SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD 深圳市华之洋光电科技有限公司								
Customer Ref.	Model No.	Drawing Title		HZ070XPQJ06-A0				
---	Approve	Material	Unmarked Tolerance	Unit	Scale	Page		
---	Checked	LCM	±0.2	mm	--	1 of 1		
Drawing No.	Draw	Penglz	Date	2024.12.19	Rev 00	