


ROSH

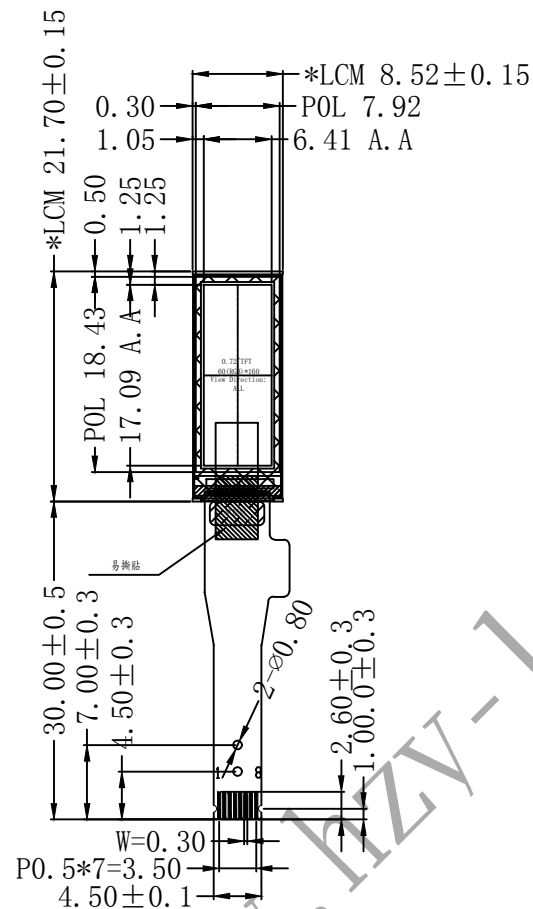

Reversion	Discription	Date	Signed
V0	First issue	2025-12-05	FJB

PIN	DESCRIPTION
1	LEDA
2	GND
3	RESET
4	RS
5	SDA
6	SCL
7	VDD
8	CS

4-SPI

NOTES:

- DISPLAY TYPE:0.72" TFT, TRANSMISSIVE
- DRIVER IC:GC9D01 or compatible
- VIEWING DIRECTION: A11
- BACKLIGHT: 1 pcs White LED
- BRIGHTNESS: $350\text{cd}/\text{m}^2$ (typ)
- INPUT VOLTAGE: VCC 2.8V (typ)
- OPERATING TEMP: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
- STORAGE TEMP: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$
- UNDEFINED DIMENSION TOLERANCE: $\pm 0.2\text{mm}$
- RoHS COMPLIABLY
- 建议机壳开窗可视区比LCD A.A区单边大 0.3mm

LEDA  LEDK
If=20mA ; Vf=3.0V (TYP)
BACKLIGHT CIRCUIT

 華之洋 HUA ZHI YANG 深圳市华之洋光电科技有限公司 SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD								
Customer Ref.	Model No.		Drawing Title		HZ0072QQPBG01-A0			
Part No.	Approve		Material	Unmarked Tolerance	Unit	Scale	Page	
Drawing No.	Checked		LCM	±0.2	mm	--	1 of 1	
	Draw	FJB	Date	2025-12-05	Rev V0		