



ROSH

Revision	Discription	Date	Signed
01	First	2022.08.23	YP

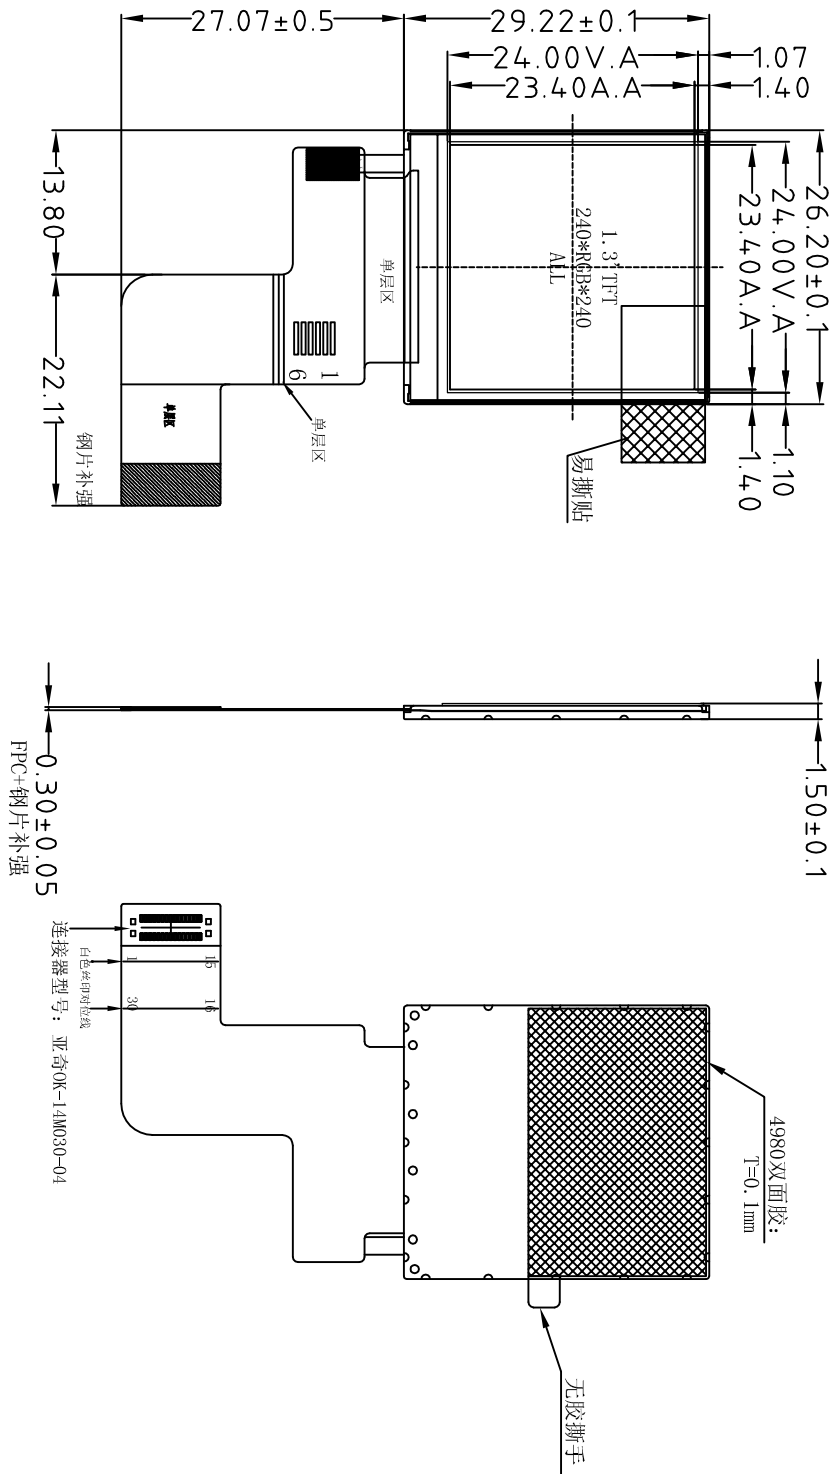

NO.	SYMBOL	PIN	NAME
1	LEDA	1	GND
2	LEDK	2	SDA
3	GND	24	SCL_TP
4	VDD2.8V	25	INT_TP
5	10VDC1.8V/2.8V	26	GND
6	IM1/2	27	GND
7	RSET	28	RST_TP
8	CS	29	VCC_TP(3.0V)
9	DC	30	GND
10	WR		
11	RD		
12	TE		
13	DB0		
14	DB1		
15	DB2		
16	DB3		
17	DB4		
18	DB5		
19	DB6		
20	DB7		
21	GND		
22	GND		
23	SDA_TP		
24	SCL_TP		
25	INT_TP		
26	GND		
27	GND		
28	RST_TP		
29	VCC_TP(3.0V)		
30	GND		

- NOTES:
1. DISPLAY TYPE:1.3" TFT, TRANSMISSIVE
  2. DRIVER IC:ST7789V2
  3. VIEWING DIRECTION: ALL O'CLOCK
  4. BACKLIGHT: 2 pcs White LED
  5. INPUT CURRENT: VCC 2.8V (type)
  6. OPERATING TEMP: -20° C ~ +70° C
  7. STORAGE TEMP: -30° C ~ +80° C
  8. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
  9. RoHS COMPLIABLY

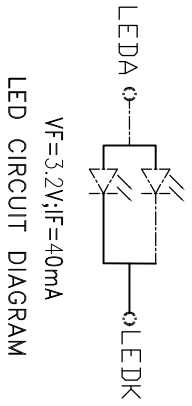

深圳市华之洋光电科技有限公司  
Shenzhen HZY Photoelectric Technology Co., Ltd

Customer Ref.	Model No.	Drawing Title	Material	Unmarked Tolerance	Unit	Scale	Page
---	---	HZ013SPBS01-A0	LCM	±0.2	mm	---	1 of 1
Part No.	Approve	Checked	Draw	YP	Date	2022.08.23	Rev 00
---	---	---	---	---	---	---	---
Drawing No.	Draw	YP	Date	2022.08.23	Rev	00	