
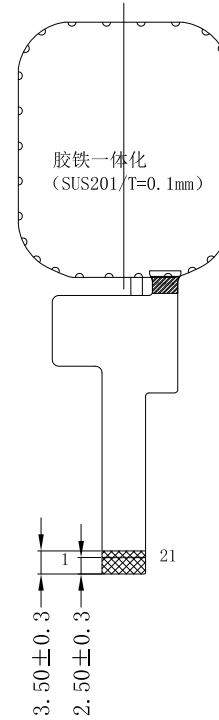
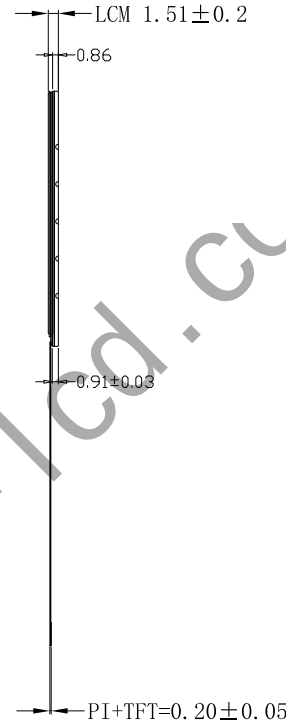


RoHS

Reversion	Discription	Date	Signed
V0	First	2026-07-15	FJB

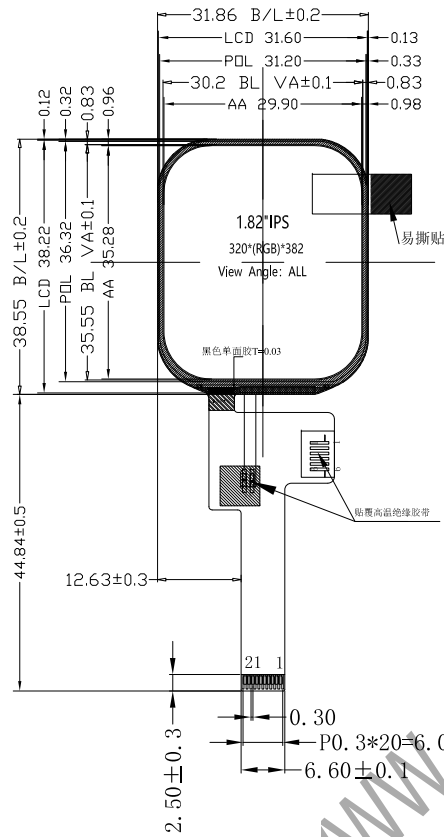


TFT定义

PIN	NAME
1	LEDA
2	LEDK
3	GND
4	VDDIO
5	VDD
6	GND
7	LCM_RESET
8	LCM_TE
9	GND
10	MIPI_CLKP
11	MIPI_CLKN
12	GND
13	MIPI_DOP
14	MIPI_DON
15	GND
16	CTP_VDD
17	CTP_RST
18	CTP_SCL
19	CTP_SDA
20	CTP_INT
21	CTP_GND

NOTES:

- DISPLAY TYPE:1.82" TFT, TRANSMISSIVE
- DRIVER IC:ST77916 or compatible
- VIEWING DIRECTION: ALL 0'CLOCK
- BACKLIGHT: 4 pcs White LED
- BRIGHTNESS: 650 cd/m2 (TYP)
- INPUT VOLTAGE: VCC 3.3V(MAX)
- OPERATING TEMP: -20° C ~ +70° C
- STORAGE TEMP: -30° C ~ +80° C
- UNDEFINED DIMENSION TOLERANCE: ±0.2mm
- RoHS COMPLIABLY



深圳市华之洋光电科技有限公司 SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD							
Customer Ref.	Model No.	Drawing Title		HZ0182HVLTS01-A0			
---	Approve	Material	Unmarked Tolerance	Unit	Scale	Page	
---	Checked	LCM	±0.2	mm	--	1 of 1	
Drawing No.	Draw	FJB	Date	2026-07-15	Rev V0		
